

Test Report

Report No. WT NET 21-299

Name of Product: Traction steel belt for lifts

Model of Product: 30PL black flat belt

Applicant: Nanyang Qingrui Transmission Machinery Equipment Co., Ltd.

Manufacturer: Nanyang Qingrui Transmission Machinery Equipment Co., Ltd.

Category of test: Commission

NETEC Inspection and Testing (Beijing) Co., Ltd.
National Elevator Inspection and Testing Center

NOTICE

1. *NETEC Inspection and Testing (Beijing) Co., Ltd.* is the impersonal entity of *National Elevator Inspection and Testing Center*, the abbreviation and logo of *NETEC Inspection and Testing (Beijing) Co., Ltd. (National Elevator Inspection and Testing Center)* both are NETEC.
2. Commission test sample is designated or delivered. NETEC is only responsible for the test items and conclusion of the sample and the applicant is responsible for the authenticity of the sample and relevant technical documents.
3. NETEC conducts commission test according to the test basis and test items appointed by the applicant. The test conclusions only indicate whether the sample meets the requirements of the test basis, and does not represent the complete test and judgment of whether the sample fully meets the national, occupation, group or enterprise standards.
4. For the test of the sample in use, due to the wear and tear, building deformation, maintenance and other factors, the test results and conclusion in the report issued by NETEC only indicate the status of the sample at the time of test, and does not represent the status when the sample delivered from the factory, installed or supervisory inspection.
5. The test report is invalid without the Test Report Specialized Stamp, paging seal, issue date, or signatures of the chief tester (test and report), verification, approval.
6. All contents of the test report issued by NETEC shall be printed out by computer except for the signature of the person in charge. Handwriting or any alteration is invalid, and any partial copy is also invalid.
7. The test report is valid only for the applicant. When the relevant parties come up controversy, the report should not be used as product quality inspection or arbitration report.
8. Different opinions about the test report should be reported to NETEC in writing within 15 workdays from the date of receiving the test report.
9. Paper report issued by NETEC is done in duplicate, NETEC keeps one, applicant keeps the other one.
10. The test report should be subject to the Chinese version, while the English version is for reference only.




NETEC Contact

Add: 61 Jinguang Ave., Guangyang District, Langfang, Hebei 065000, P.R.China

Tel: +86 316 2311414, +86 316 2632627 Fax: +86 316 2057334

Email: netec@chinaelevator.org

Name of product		Traction steel belt for lifts	
Model of product		30PL black flat belt	
Serial No. of sample		/	Production date /
Applicant	Name	Nanyang Qingrui Transmission Machinery Equipment Co., Ltd.	
	Registered address	No.324, Gaomiao Village, Gaomiao Town, Wancheng District, Nanyang, Henan	
Manufacturer	Name	Nanyang Qingrui Transmission Machinery Equipment Co., Ltd.	
	Registered address	No.324, Gaomiao Village, Gaomiao Town, Wancheng District, Nanyang, Henan	
	Manufacturing address	No.324, Gaomiao Village, Gaomiao Town, Wancheng District, Nanyang, Henan	
Sample state	No abnormal	Receiving date	2021-08-11
Test place	NETEC	Sample No.	Q2021-0838
Test date	2021-08-12	Sample amount	1
Test condition	Temperature: 31.2℃, relative humidity: 44.9%		
Test basis	GB/T 39172—2020 Non-steel wire rope suspension means for lifts § 5.3.1		
Test conclusion	The test results of Traction steel belt for lifts comply with the requirements of the test basis. Issue date of the English version: 2022-04-07		
Note	Issue date of the Chinese version: 2021-08-16		


Reported by:  Verified by:  Issued by: 



1 Test items and test results

No.	Standard clause No. / Test item	Test contents and requirements	Test results
1	GB/T 39172-2020 §5.3.1 Measured breaking force	The measured breaking force shall not be less than the minimum breaking force of coated rope (belt).	Minimum breaking force: 43kN Measured breaking force: 45.64kN Comply with requirements

2 Test curve

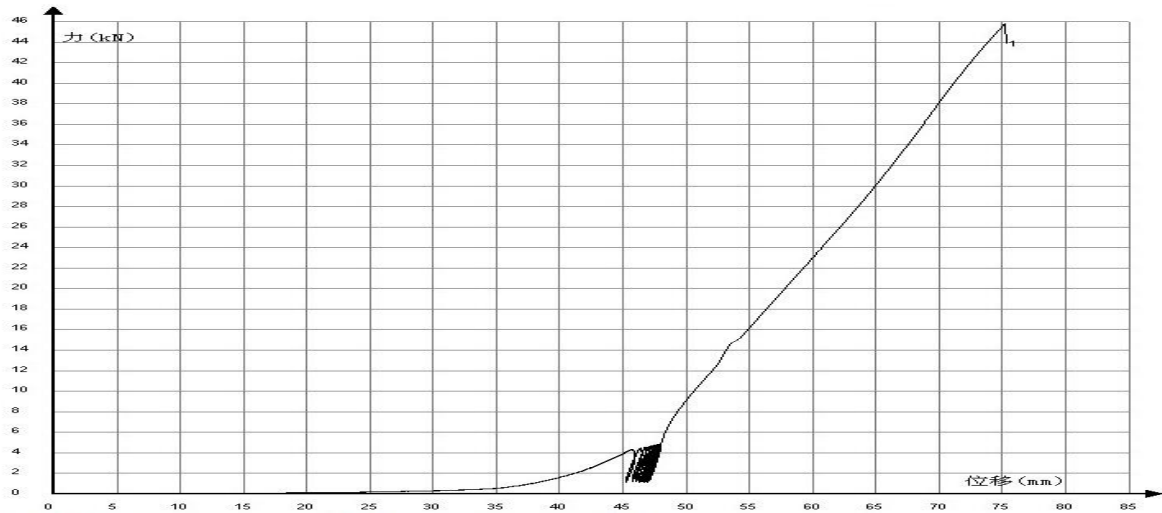

3 Sample photo

